




## HOME LINK

4" Screen

SI.HL

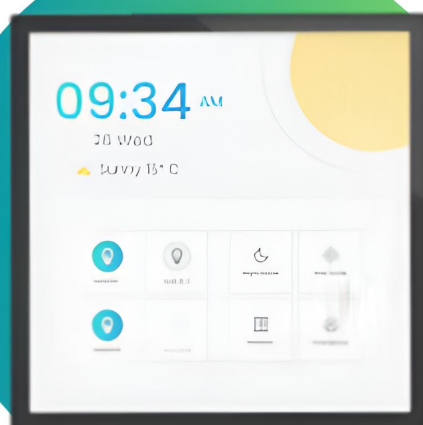

---

### Quick Links

---

[Product Overview](#)

[Product Features](#)

[Technical Specification](#)

[Installation](#)

## **Product Description**

### **Product Overview :-**

**Model Number:** SI.HL

**Description:**

This product features an 480\*480 high-definition display screen. The built-in Wi-Fi gateway allows for smart home device control, scene interactions, home device automation, and remote app control.

**Application:**

It is ideal for residential homes, hotels, offices, and commercial spaces, providing centralized management of lighting, dimming, scenes, and other smart devices.

### **Product Features :-**

- Manage all loads connected with SmartNode devices, including lights, curtain, AC, etc. directly from the Touch panel.
- Configure and customize smart home scenes from SmartNode application.
- 4-inch HD LED multi-touch screen, dual array microphone, auto light sensor, built-in 1W speaker.
- Only one user ID can be assigned per Home Link Lite for secure and personalized control.

### **Product Benefits :-**

- Activate scene modes with one touch on the panel, making it easy to switch between different settings like "Night," "Morning," "Vacation," and "Movie.
- Provides an intuitive and user-friendly interface.
- No need for an application to operate load.
- Centralized control for a seamless smart automation experience.

## Technical Details

### Technical Specification:-

Operating Input Voltage	100VAC - 240VAC
Supported Frequency	50-60 Hz
RAM	2GB
ROM	8GB
CPU	Rockchip PX30 Quad Cortex-A35
Screen size	4 inch (480P x 480P)
Port	USB Type-C Port
Miscrophone	Dual array microphone and 1W Mono speaker
OS	Android 11
Color	Black
Dimensions	86mm x 86mmx 36.4mm (With the back base)
Working Temperature	0°C to +40°C non condense
Working Humidity	5% to 90%RH (Non-condensing)
Communication Protocol	Wi-Fi 2.4 GHz 802.11 b/g/n
Warranty	5 years

## **Installation**

- Turn off the main power and confirm the live wire is inactive using a test pencil.
- Separate the back base from the panel using the built-in magnetic force.
- Connect the live wire to terminal L and the neutral wire to terminal N.
- Fasten the base to the wall box with mounting screws.
- Fix the Home Link Lite back to the base using the built-in magnetic force.

**Note:** Avoid overtightening screws to prevent screen or hardware damage. If the panel is not flat after installation, do not press the screen forcefully; check the wall box and base installation instead.

## **Safety Information:-**

- This product must be installed by professional electricians.
- DO NOT install with power applied to the device.
- DO NOT expose the device to moisture.
- Verify input voltage compatibility with the device.
- Secure and label wiring for easy maintenance.

## User Interface and Ports:-

