


## Smart Device

Model No. : SD.4XDXX

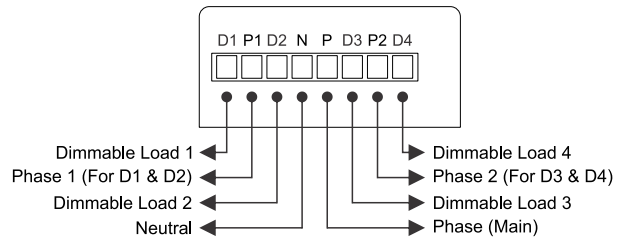

Wiring diagram

### Objectives

Voice control, Mood-based scene settings, Appliance scheduling, and Geo-location based control.

### What it controls

Light, Dimming light, etc.

### Technical Attributes

Combination	0 Humming free fan 4 Dimmable load 0 Normal load 0 Heavy load
Operating input voltage	100 -240 VAC.
Supported frequency	50-60 Hz
Communication protocol	Wi-Fi 2.4 GHz 802.11 b/g/n
Product weight (gms)	100
Mode of operation	Physical, Voice, Mobile app
Max.load (fan)	N/A
Max.load (per dimmer, up to 3 LED)	100 watt
Max.load (per normal load switch, up to 3 LED)	N/A
Max.load (per high load switch, up to 4 LED)	N/A
Wi-Fi signal strength min.	>50 %
Min.internet speed required	512 Kbps
Data consumption	< 3mb/month
Operating temperature	0°C - 65°C non condense
Product size	70mm x 52mm x 25mm
Module size (product size)	2
Material	ABS
Shockproof	No
Water resistance	No

### Features



0%-100% brightness dimming



Internet independent scheduling



Anti-shock switching



Compatible with traditional switches and capacitive switches



OTA update support



Hassle free installation



3-way touch control



Smooth dimming