


Smart Device

Model No. : SD.4XXNX

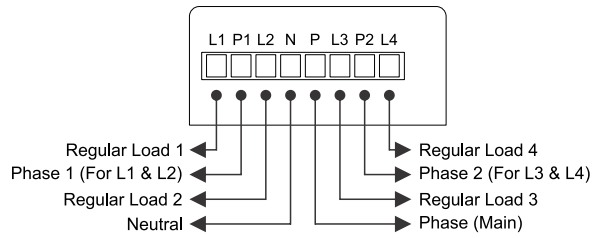

Wiring diagram

Objectives

Voice control, Mood-based scene settings, Appliance scheduling, and Geo-location based control.

What it controls

Light, Set top box, TV, etc.

Technical Attributes

Combination	0 Humming free fan 0 Dimmable load 4 Normal load 0 Heavy load
Operating input voltage	100 -240 VAC.
Supported frequency	50-60 Hz
Communication protocol	Wi-Fi 2.4 GHz 802.11 b/g/n
Product weight (gms)	102.4
Mode of operation	Physical, Voice, Mobile app
Max.load (fan)	N/A
Max.load (per dimmer, up to 3 LED)	N/A
Max.load (per normal load switch, up to 3 LED)	1500 watt
Max.load (per high load switch, up to 4 LED)	N/A
Wi-Fi signal strength min.	>50 %
Min.internet speed required	512 Kbps
Data consumption	< 3mb/month
Operating temperature	0°C - 65°C non condense
Product size	70mm x 52mm x 25mm
Module size (product size)	2
Material	ABS
Shockproof	No
Water resistance	No

Features



Internet independent scheduling



Anti-shock switching



Compatible with traditional switches and capacitive switches



OTA update support



Hassle free installation