


HOME LINK PRO

SI.HP

8" SCREEN WITH KNOB



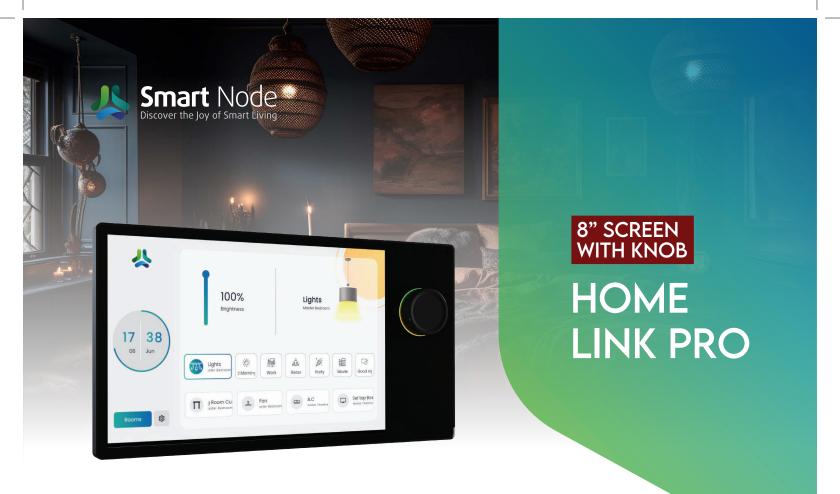

SAFETY INSTRUCTIONS

- Turn off the main power in the electricity box and confirm the live wire is not alive with a test pencil.
- O Separate the back base from the panel by built-in magnetic force.
- O Connect the live wire to terminal L and the neutral wire to terminal N.
- Fasten the base to the wall box with mounting screws and fix the Home link proback to the base by built-in magnetic force.
- Note that the screws should not be fixed too tight during installation in case of any deformation or damage to the screen and hardware.
- If your Home link pro is not flat after installation, do not press the screen violently, please check the wall box and the base installation first.







FEATURES

O Comprehensive Control:

Manage lights, curtains, air conditioners, and all other smart home devices from a single panel.

Smart Scenes:

Configure and customize smart home scenes in the SmartNode app.


Activate scene modes with one touch on the screen, making it easy to switch between different settings like "Night," "Morning," "Vacation," and "Movie."

O User-Friendly Interface:

The intuitive touch screen makes it simple to navigate and control all your devices.

Control dimming, AC temperature and television volume through the Smart Home Pro knob.



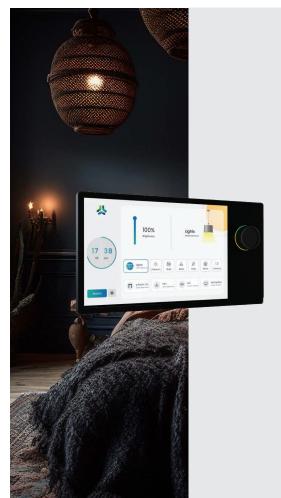


TECHNICAL INFORMATION

Input power	100-240 VAC, 50-60 Hz
Working Temperature	0°C - +40°C
Working Humidity	5% to 90%RH(Non-condensing)
Wireless Protocol	Wi-Fi
RAM	2GB
ROM	16GB
OS	Android 11
Screen	6 inches
Port	USB Type-C port
Dimensions	238.4x125x36.4mm (With the back base)

USER INTERFACE AND PORTS



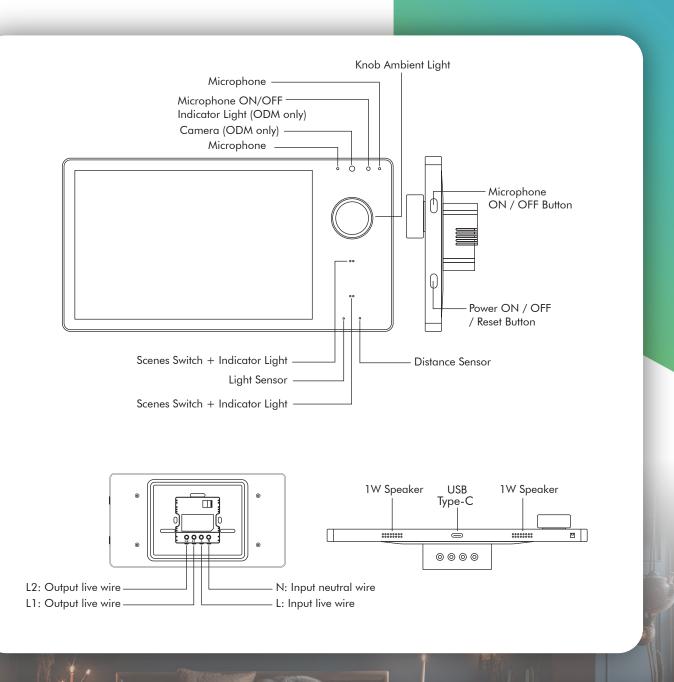

Smart Node Automation Pvt. Ltd.

A-09-02-B, Kamdhenu Industrial Estate Opp, Gorwa Water Tank, Gorwa, Vadodara-390016 Tel.: +91 8200824126 | Email: info@smartnode.in www.smartnode.in