




Smart Node
Discover the Joy of Smart Living

smartnode.in

SCENE CONTROLLER

With Touch Interfaces and with Keypad



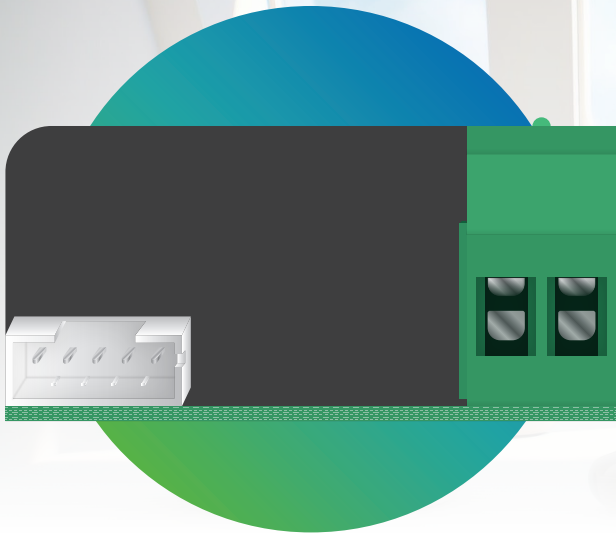


PANEL

SCENE CONTROLLER

WHAT IS IN THE BOX?


WITH PANEL

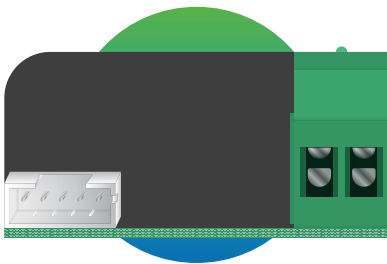

Scene controller



Touch Interface



Touch cable

SD.SSC.1 TECHNICAL INFORMATION

Operating Voltages	100 - 240 VAC
Module size	2M
Operating temperature	0°C - 65°C Non condense
Warranty	5 years
Shock proof	Yes
Water resistance	No
Dimension	92.60mm X 89.10mm

TECHNICAL ATTRIBUTES **TI.4S** Scene Controller


Module size	2M
TI dimension	92.60mm X 89mm
TI shock proof	Yes
TI water resistance	Yes
Contact type	Capacitive
Mounting type	Wall mount
Touch button	4
Remote control working range	8 meter
Wireless type	Wi-Fi 2.4 GHz 802.11 b/g/n

TECHNICAL ATTRIBUTES **TI.8S** Scene Controller

Module size	6M
TI dimension	226.20mm X 89mm
TI shock proof	Yes
TI water resistance	Yes
Contact type	Capacitive
Switch type	IR switch
Mounting type	Wall mount
Touch button	8
Remote control working range	8 meter
Wireless type	Wi-Fi 2.4 GHz 802.11 b/g/n




8 SCENE CONTROLLER TOUCH

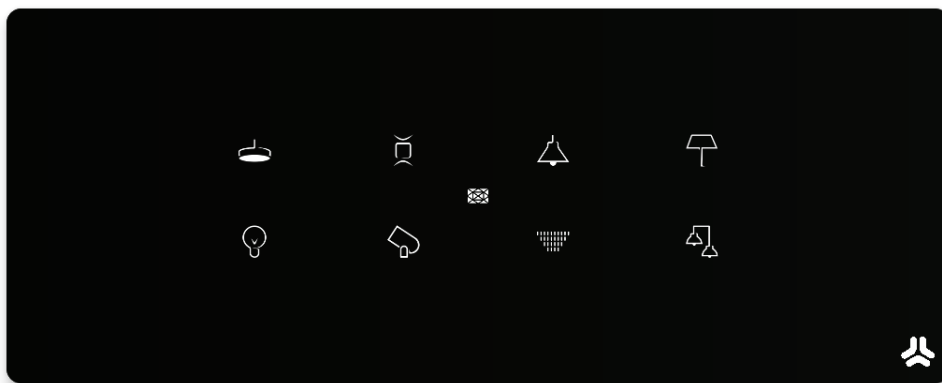

16 scenes in 8 switches with tap and long press options

4 SCENE CONTROLLER TOUCH

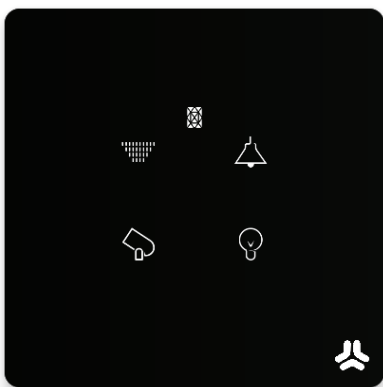



8 scenes in 4 switches with tap and long press options


TUTORIALS TAP ON THE BUTTONS

To start configuration mode
in Scene Controller

To add a Scene controller to the
Smart Node mobile app

DIAGRAMS

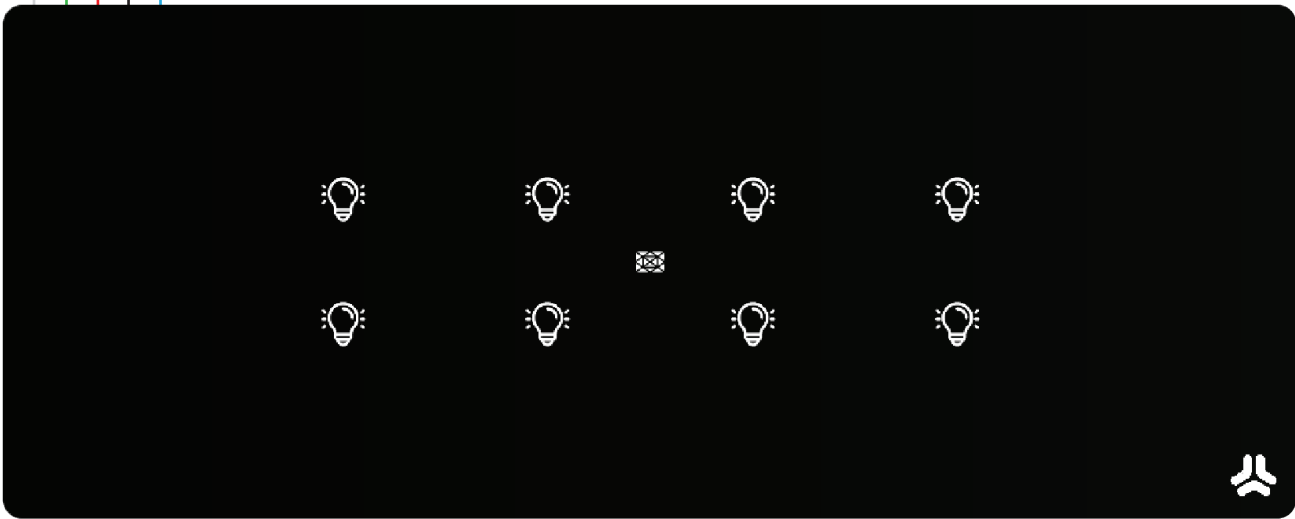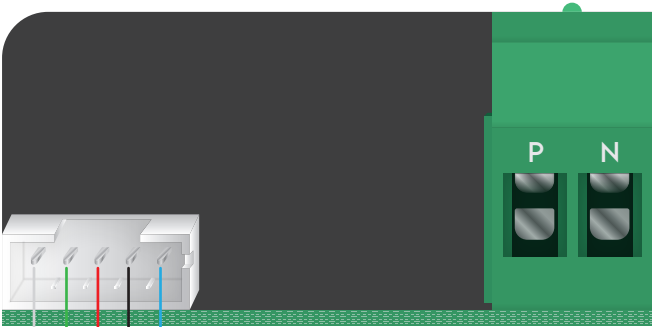

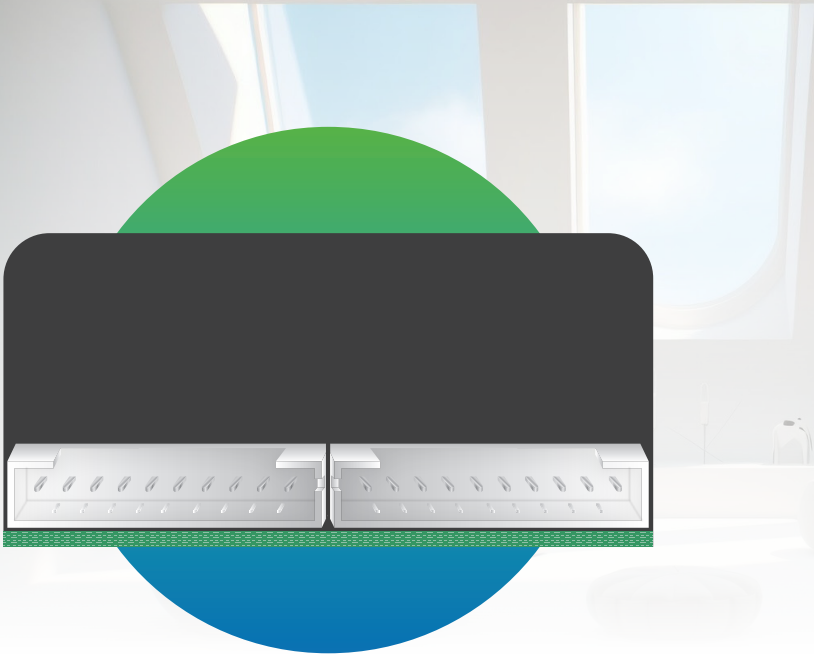


KEYPAD


**SCENE
CONTROLLER**

**WHAT IS IN
THE BOX?**


WITH KEYPAD



Scene controller



Keypad



Touch cable

SD.SSC.1 TECHNICAL INFORMATION

Operating Voltages	100 - 240 VAC
Module size	2M
Operating temperature	0°C - 65°C Non condense
Warranty	5 years
Shock proof	Yes
Water resistance	No
Dimension	92.60mm X 89mm
Touch button / Keypad	4 or 8
Operating Voltages	24 VDC
Power consumption per LEDs	10mA



COLOR CODE

Color Cable	Input (Switch)	Output (LED)
Red	Vcc	Vcc
Black	Ground	Ground
Blue	I1	O1
White	I2	O2
Green	I3	O3
Brown	I4	O4
Purple	I5	O5
Orange	I6	O6
Grey	I7	O7
Yellow	I8	O8

16 scenes in 8 switches
with tap and long press options

TUTORIALS TAP ON THE BUTTONS

To start configuration mode
in Scene Controller

To add a Scene controller to the
Smart Node mobile app

DIAGRAMS

